

CGI-Browser-CGI



foo.org



qux.com




bar.com




geht.net


CGI-Browser-CGI

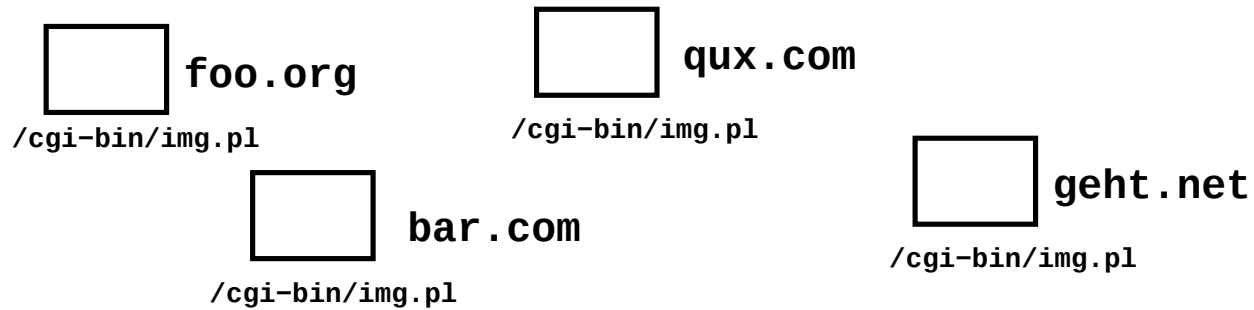

CGI-Browser-CGI

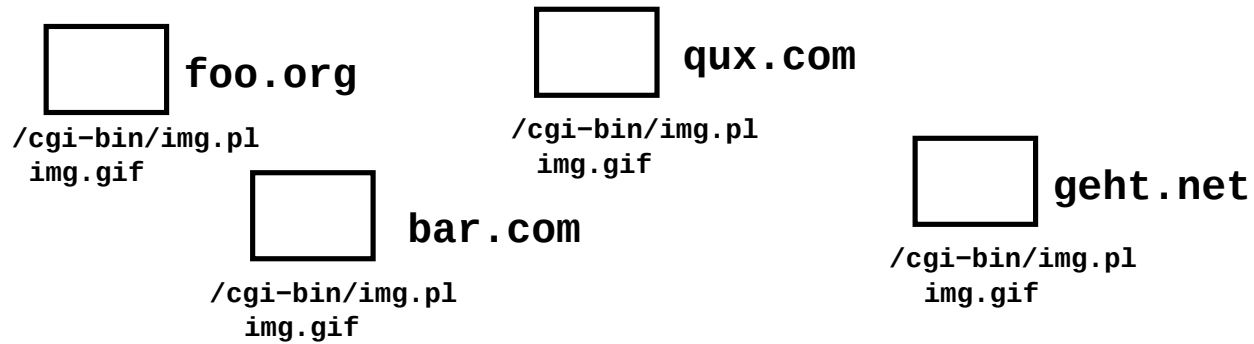


CGI-Browser-CGI

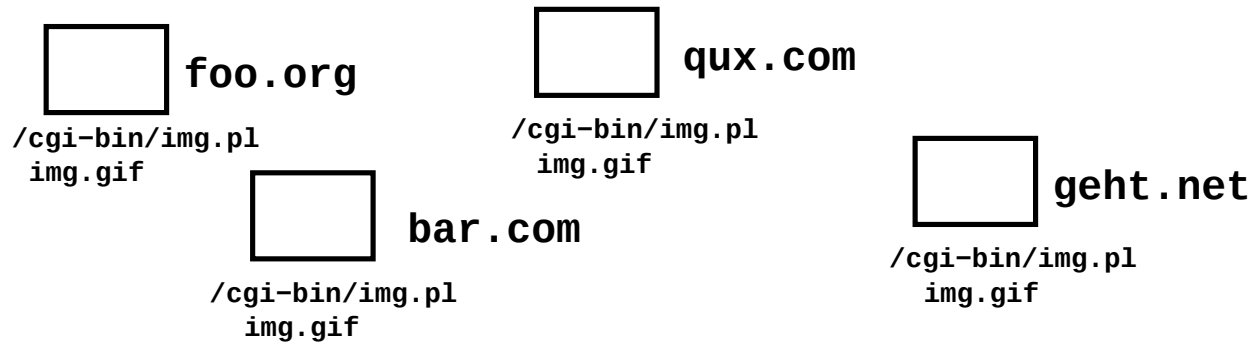

`http://harmless.org/index.html`

CGI-Browser-CGI

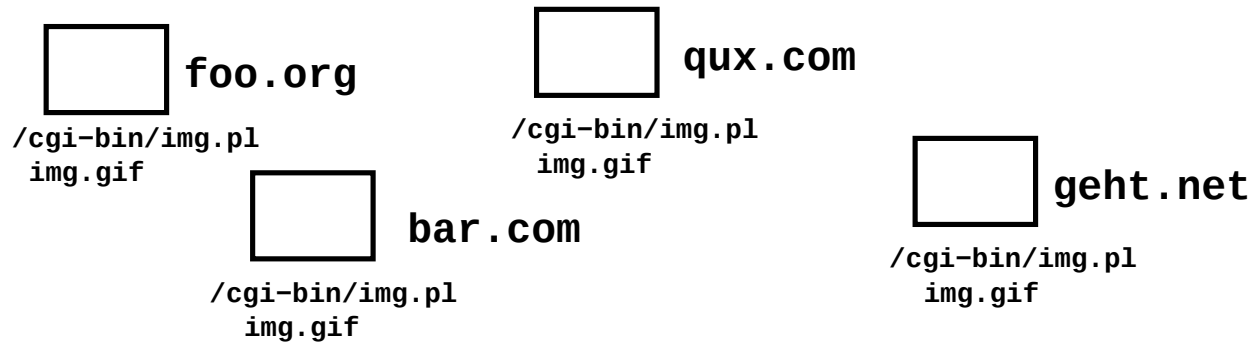


<http://harmless.org/index.html>


```

```


CGI-Browser-CGI

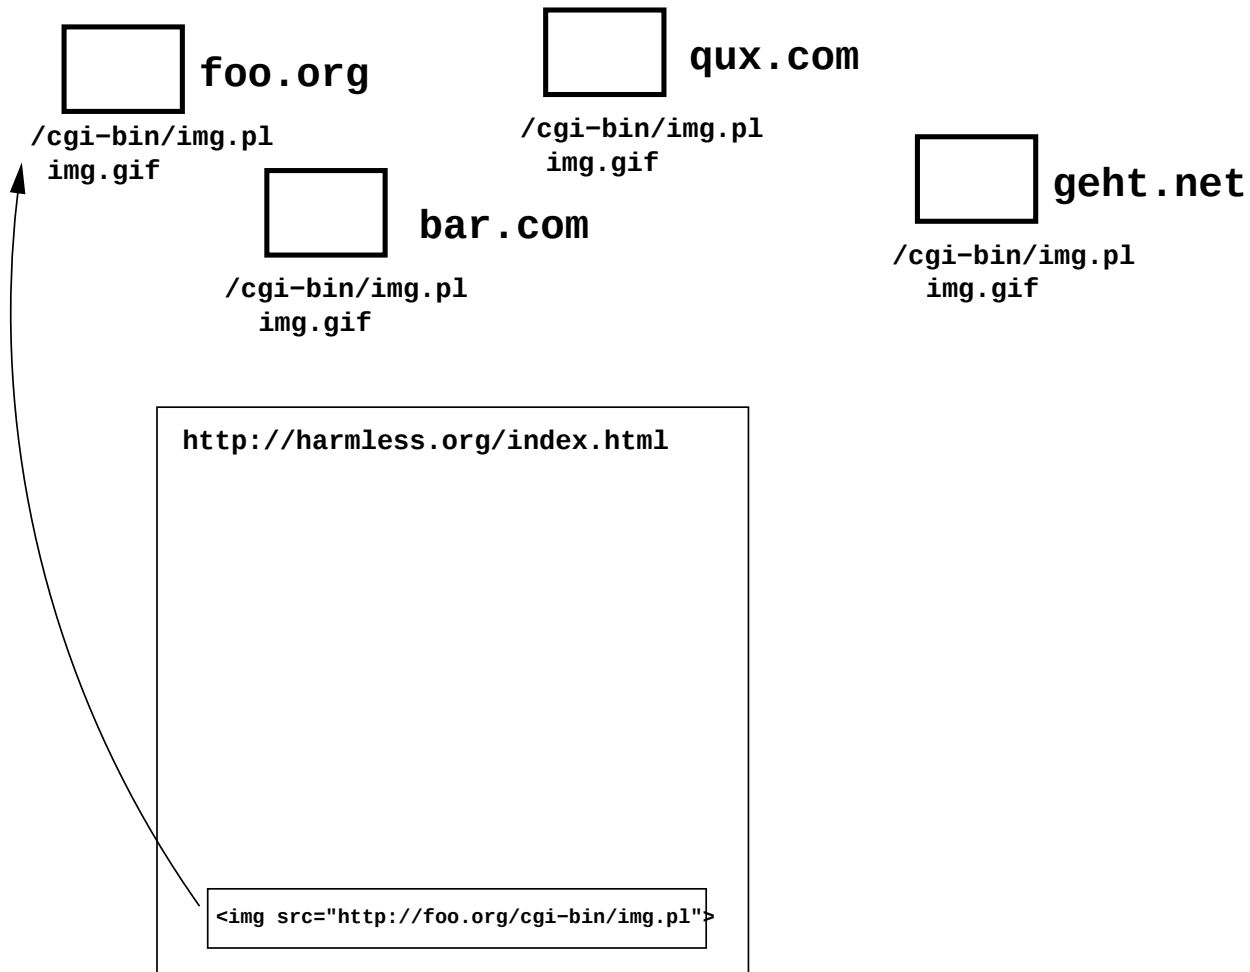


CGI-Browser-CGI

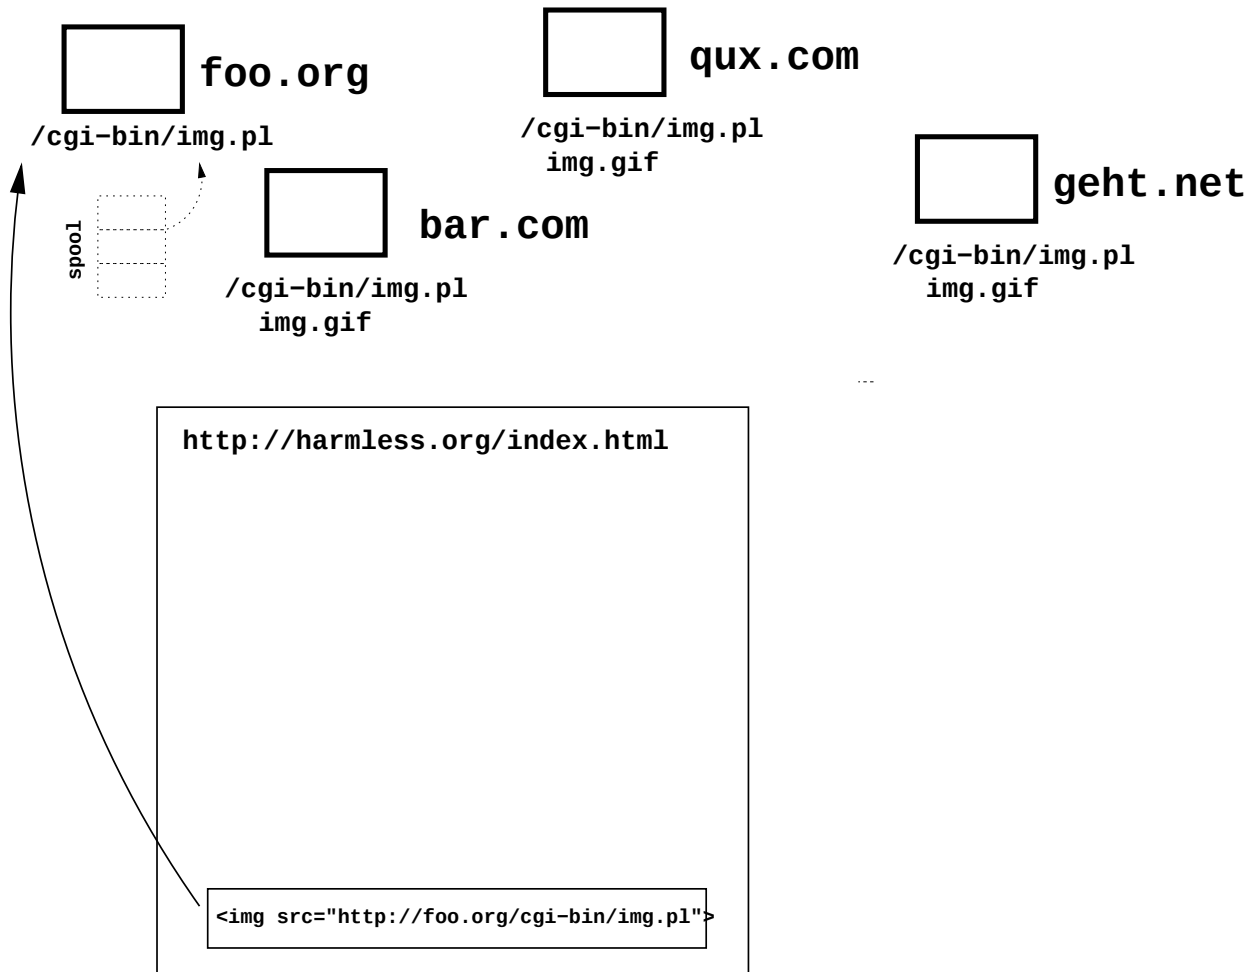


CGI-Browser-CGI

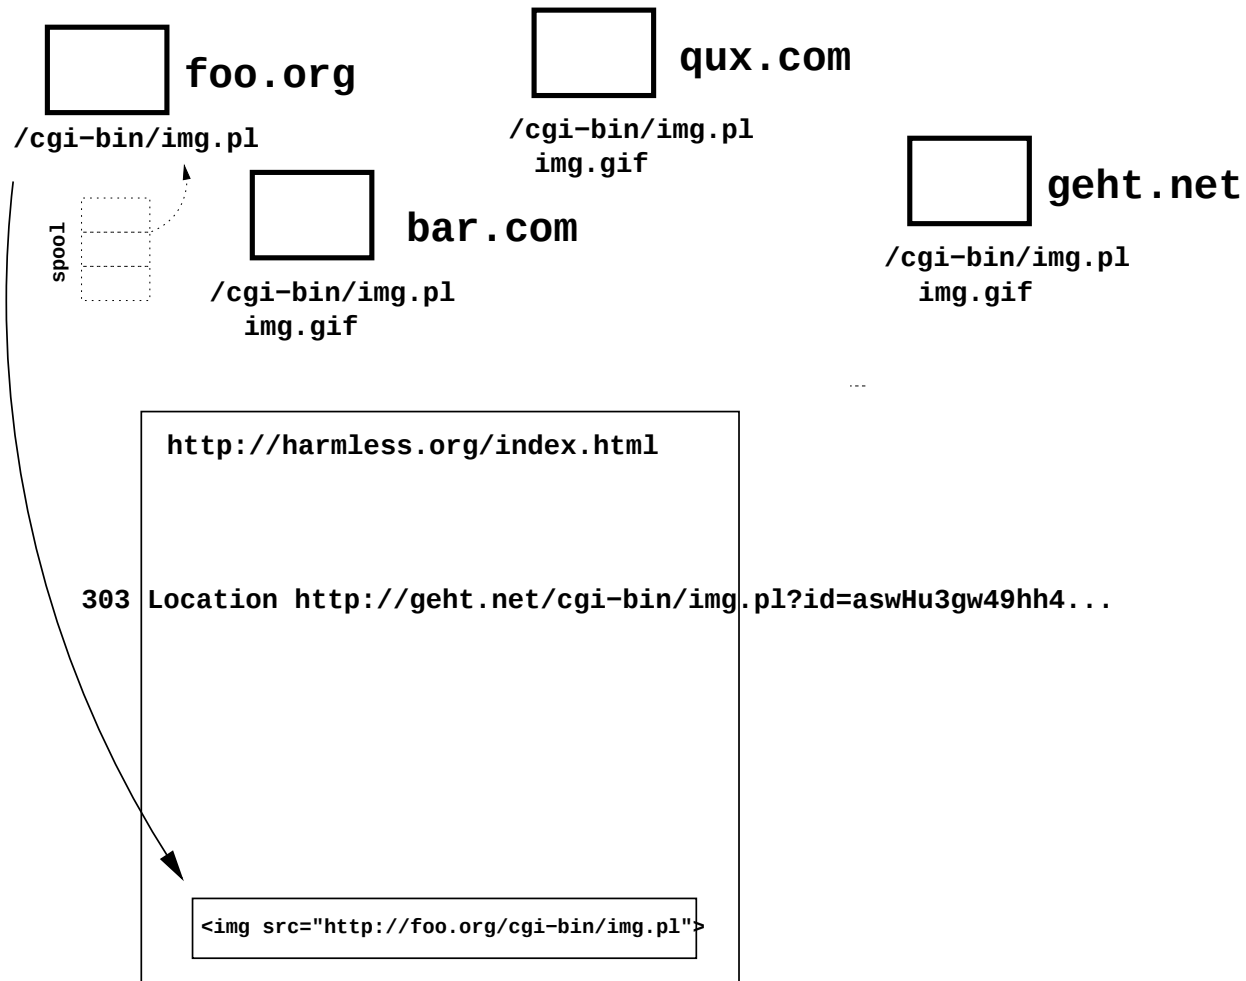


CGI-Browser-CGI

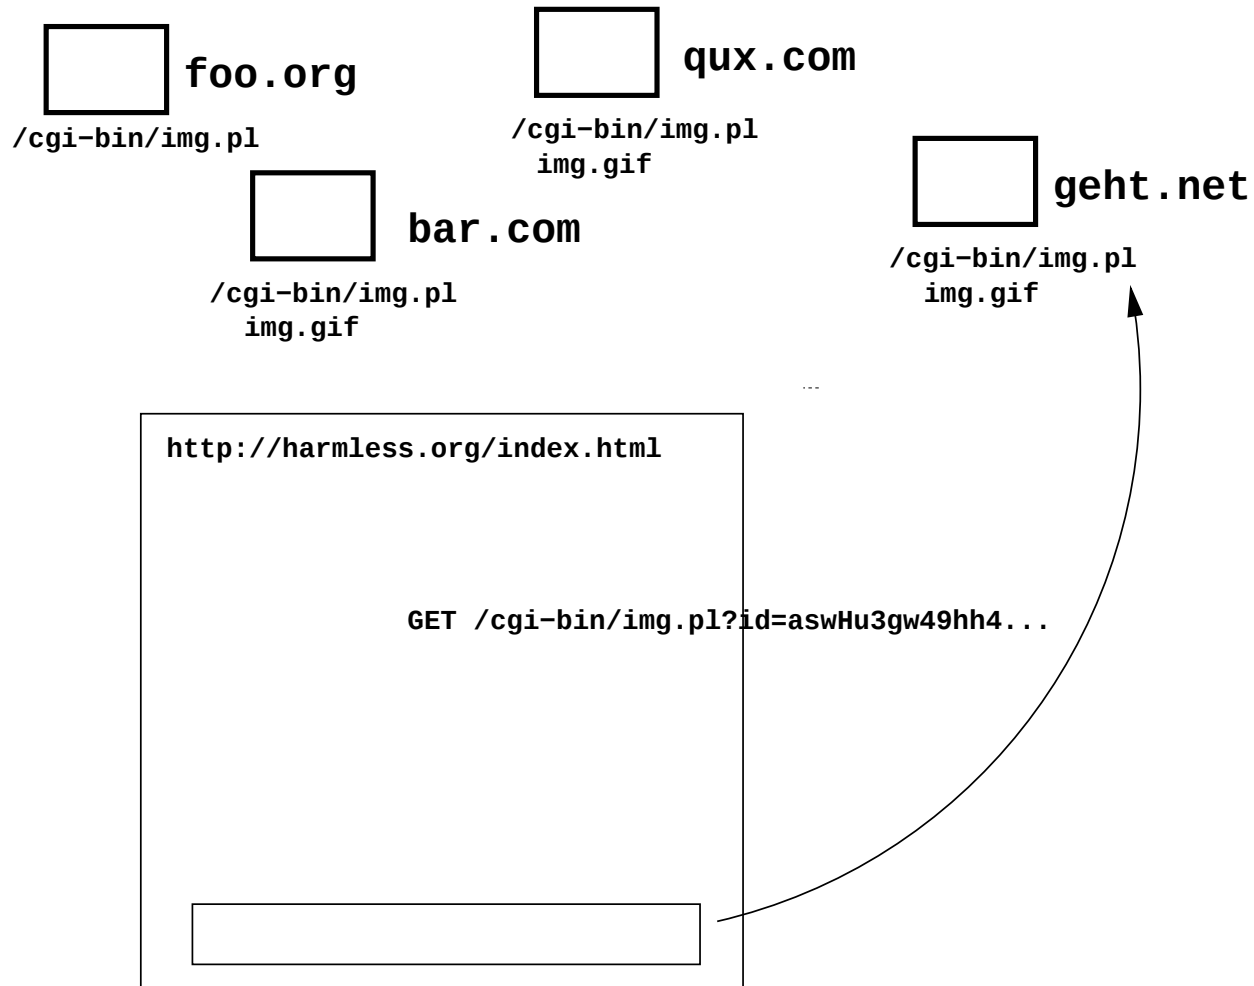


CGI-Browser-CGI

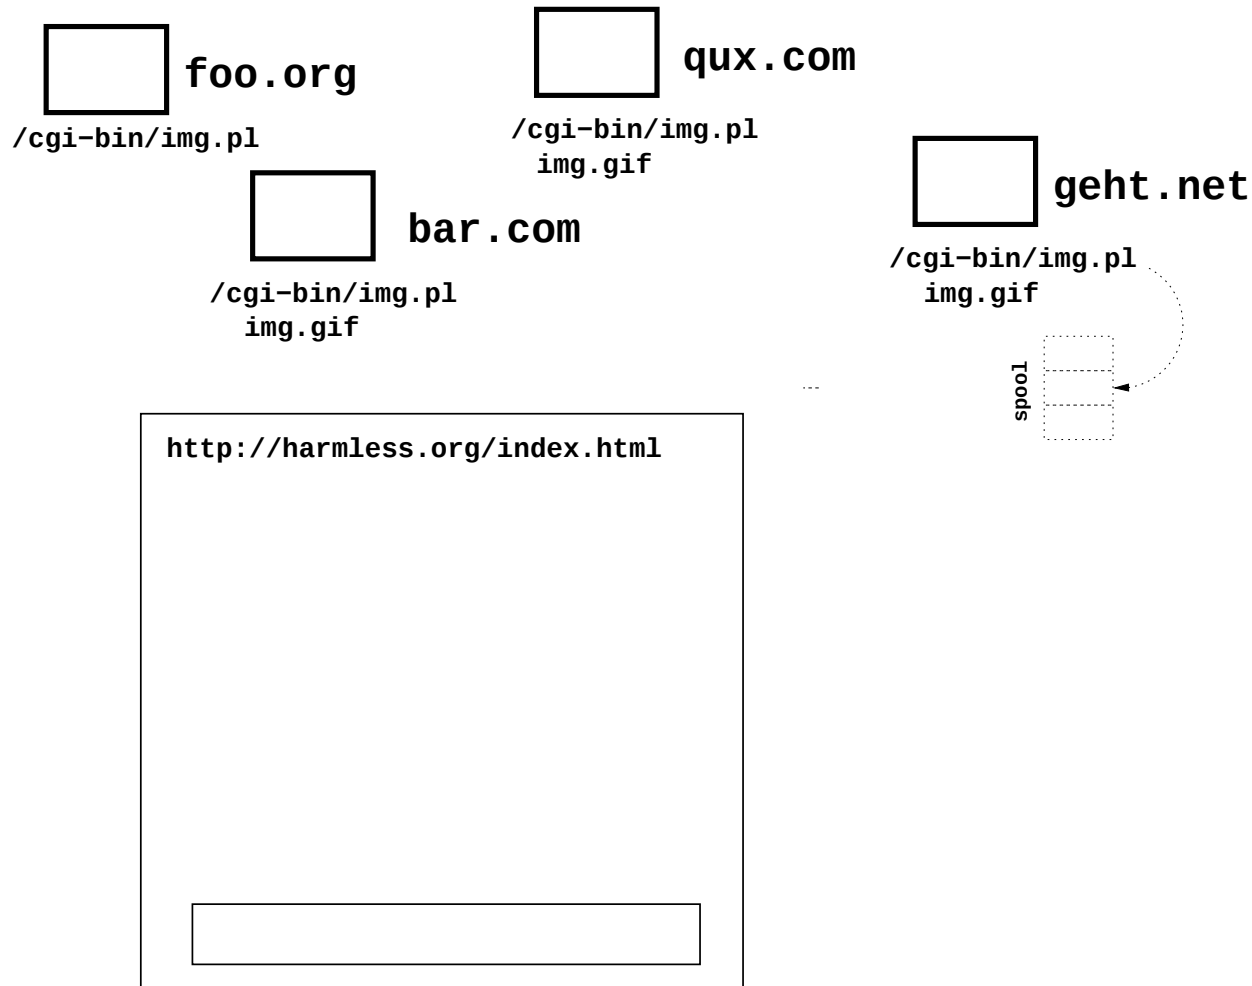


CGI-Browser-CGI

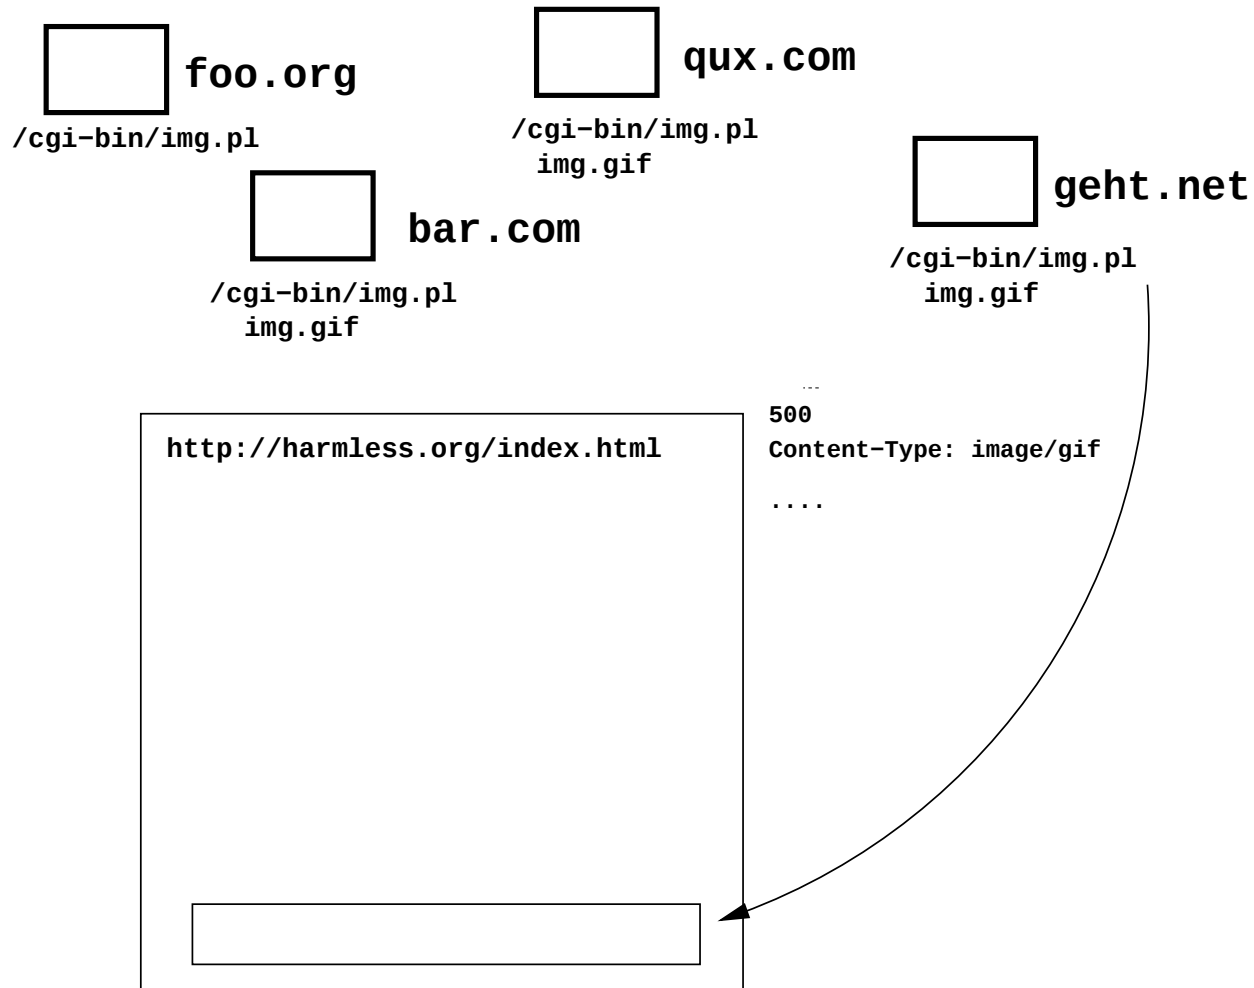


CGI-Browser-CGI

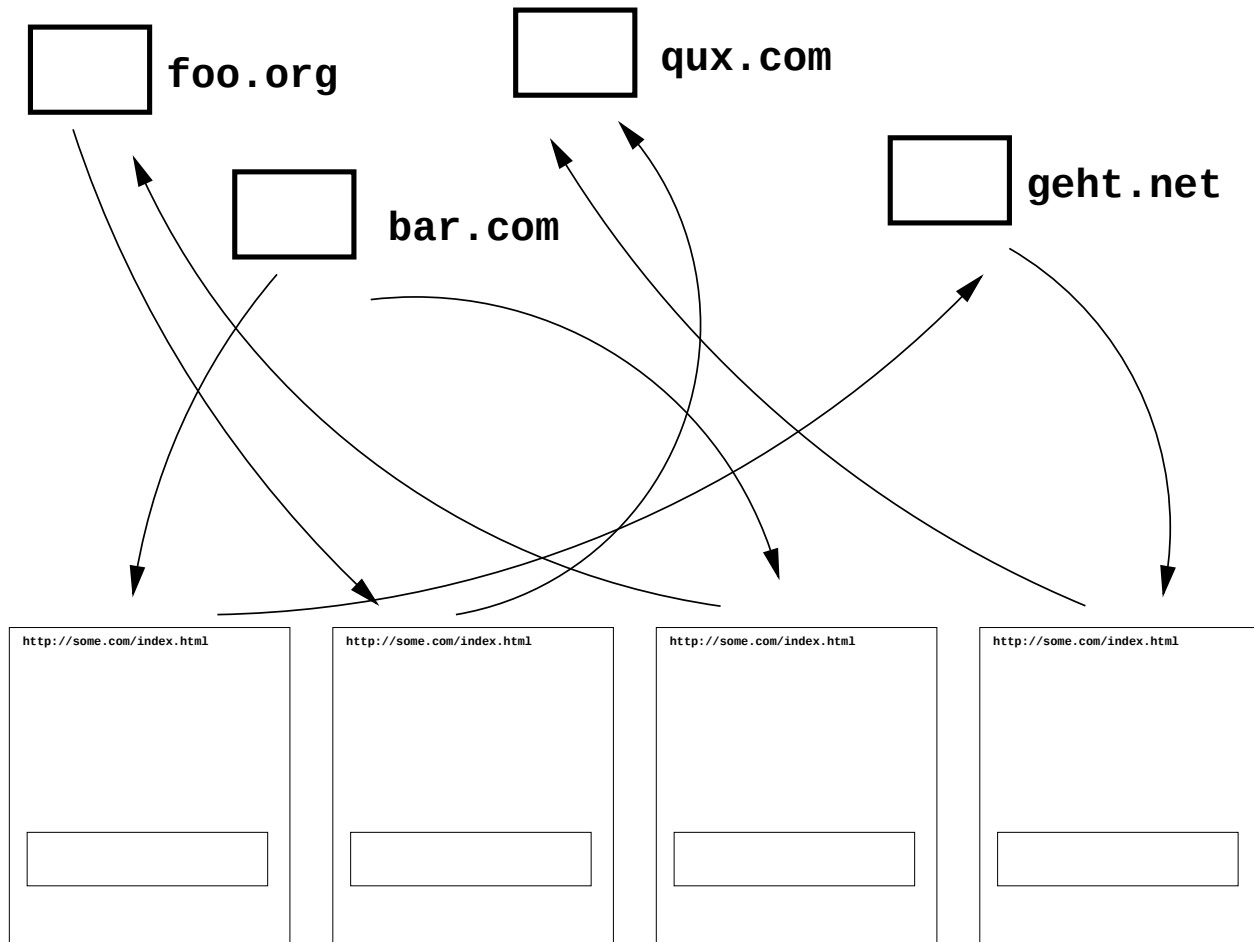


Same with Acks

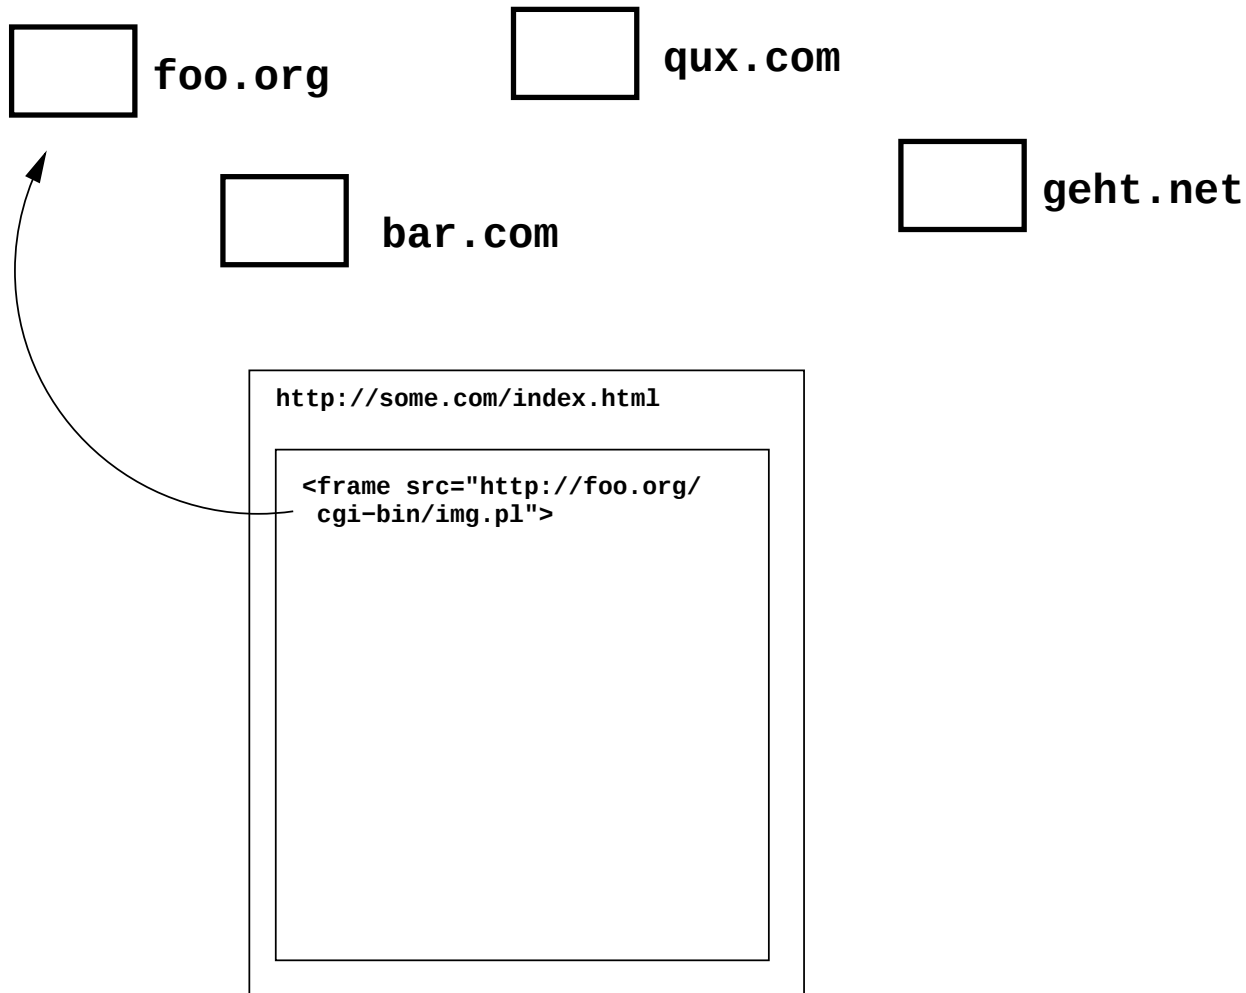


Same with Acks

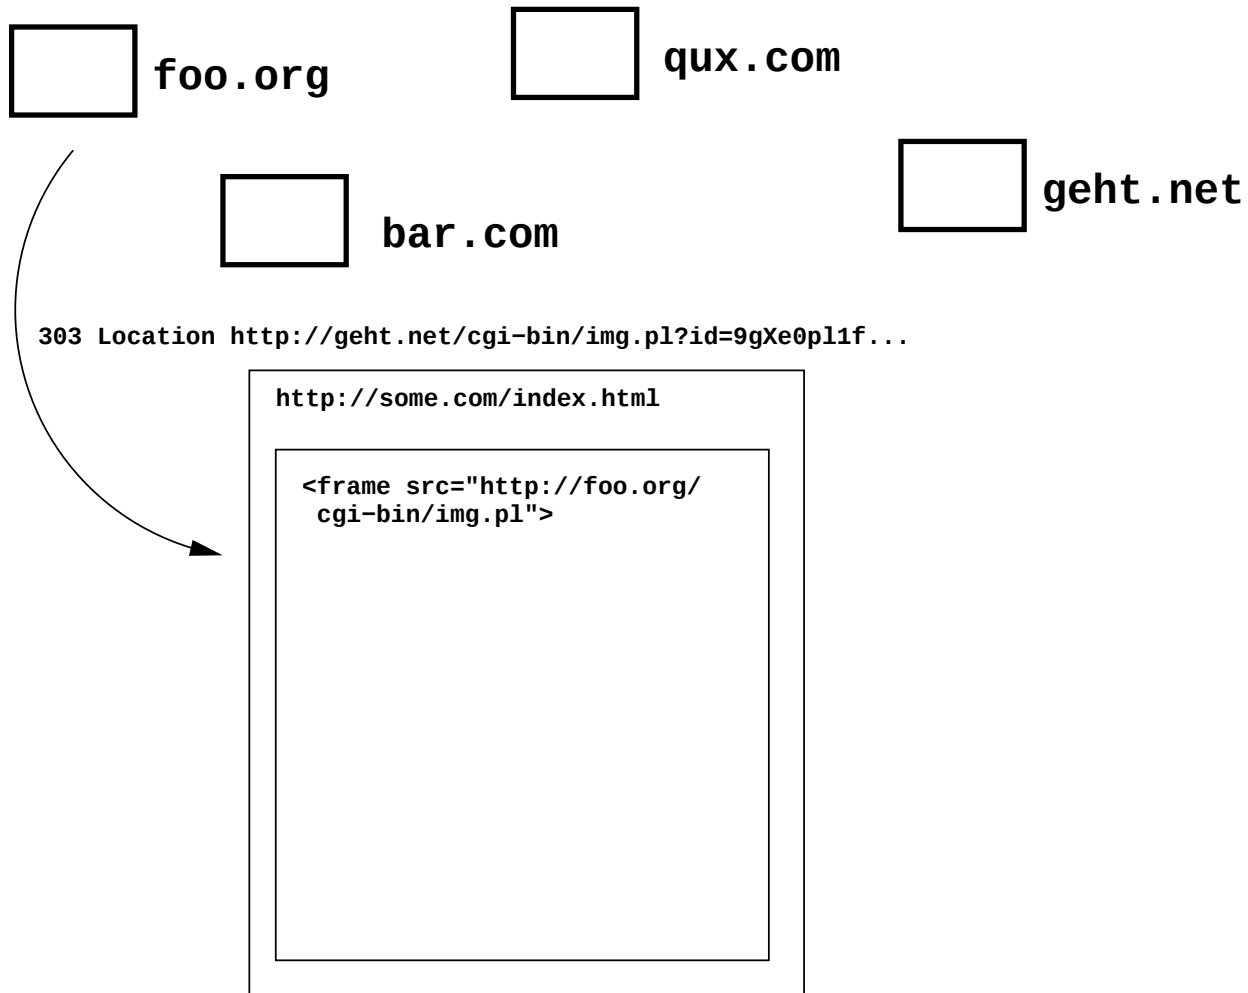


Same with Acks

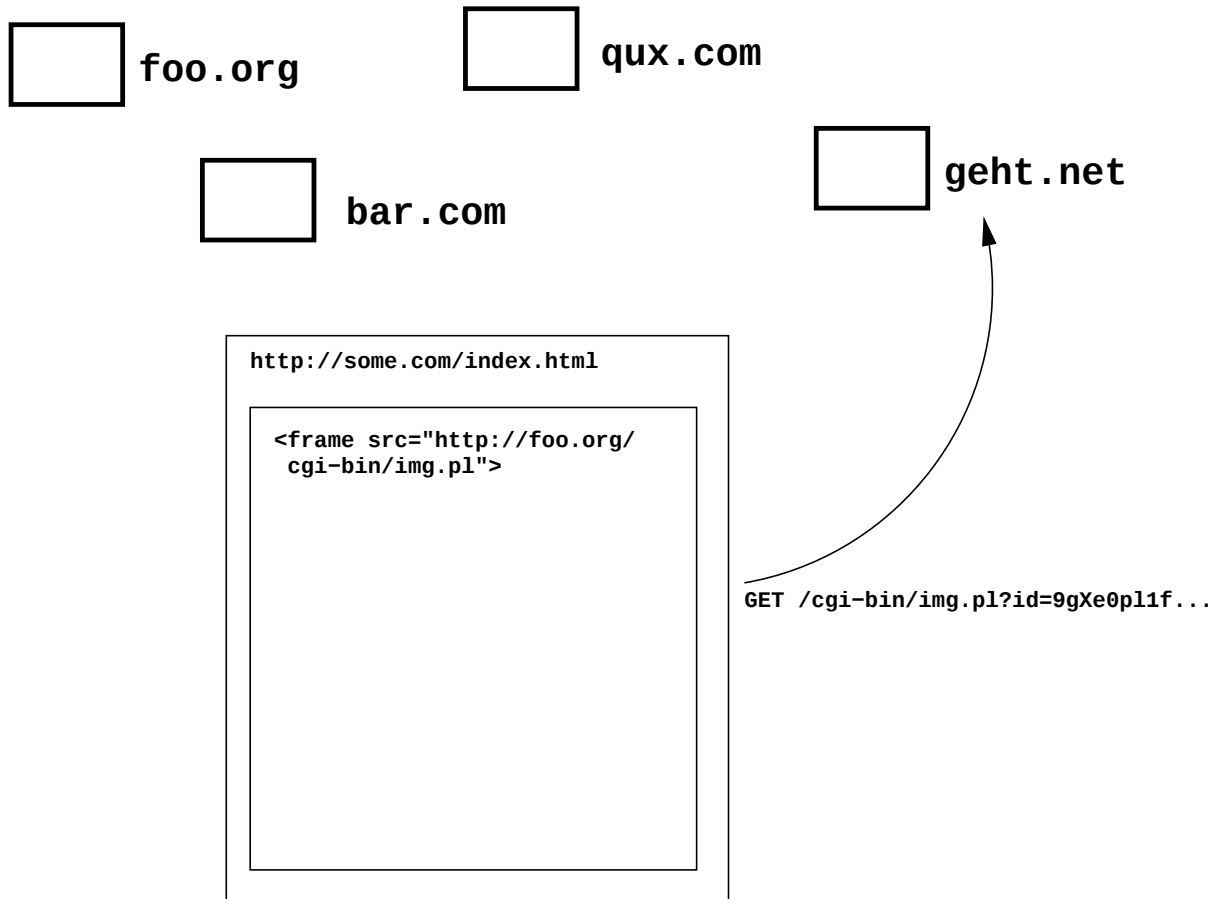


Same with Acks

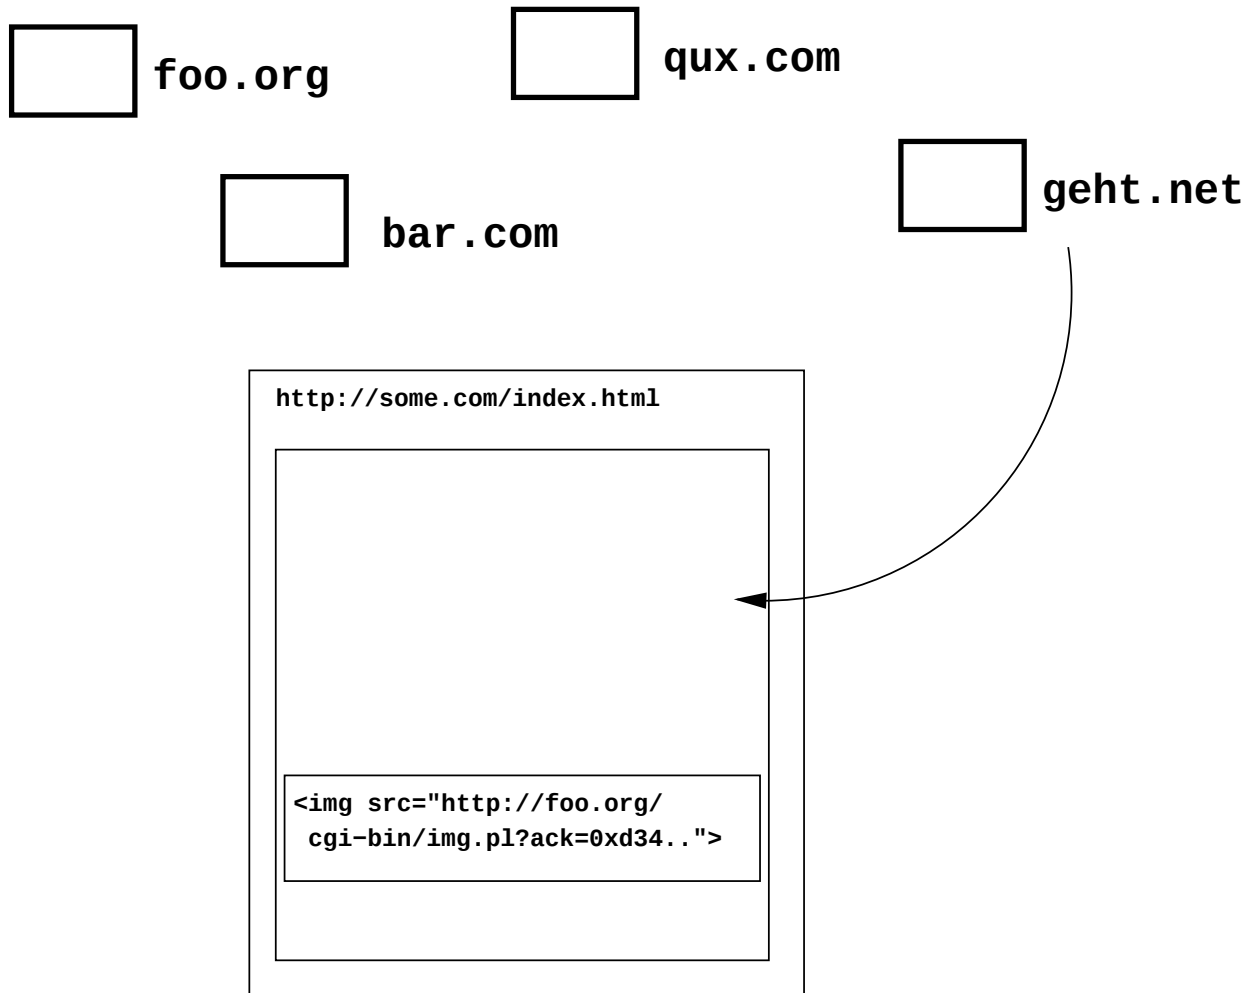

Same with Acks

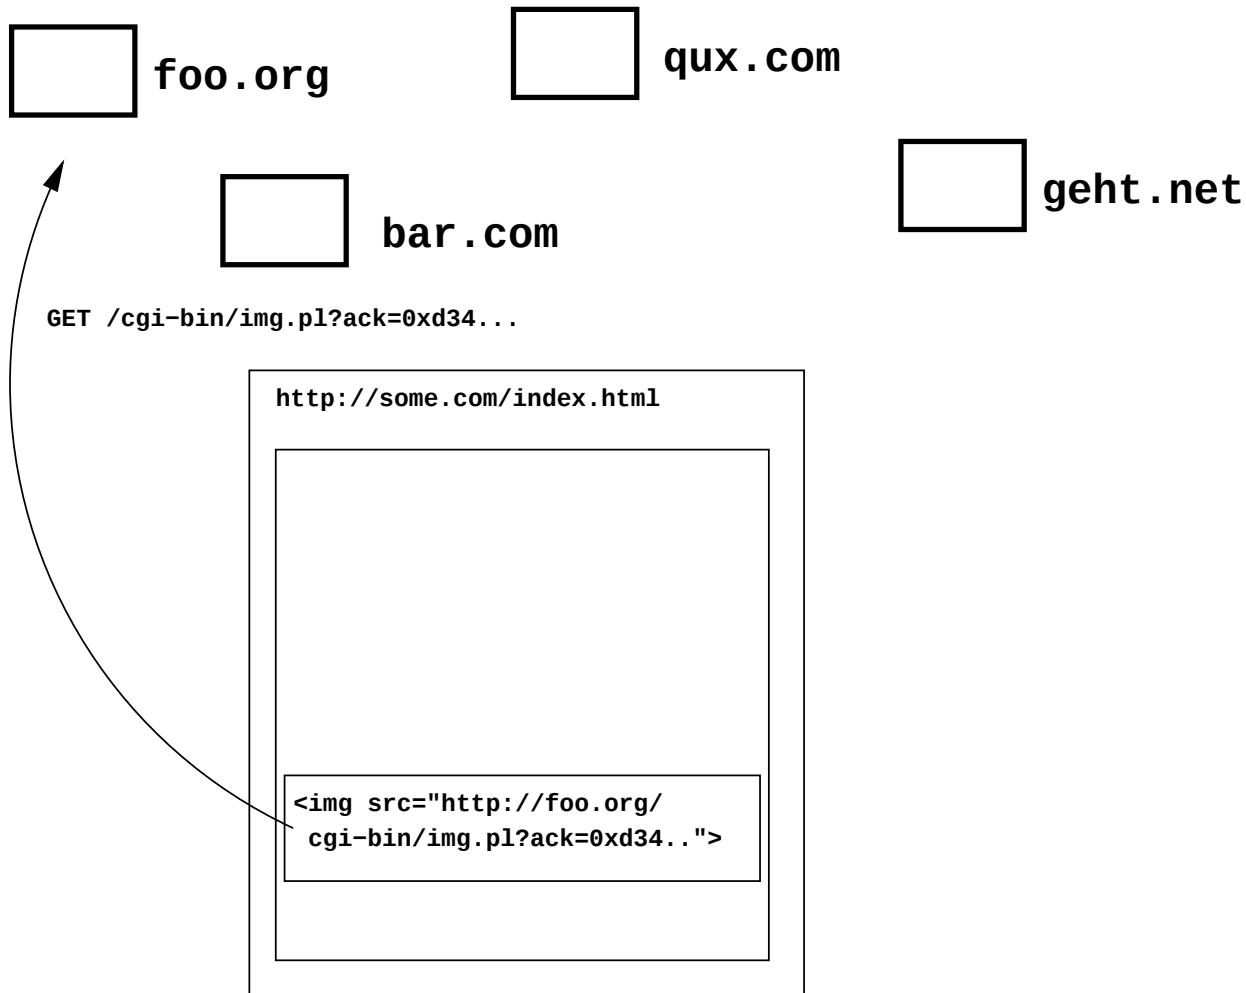

Same with Acks

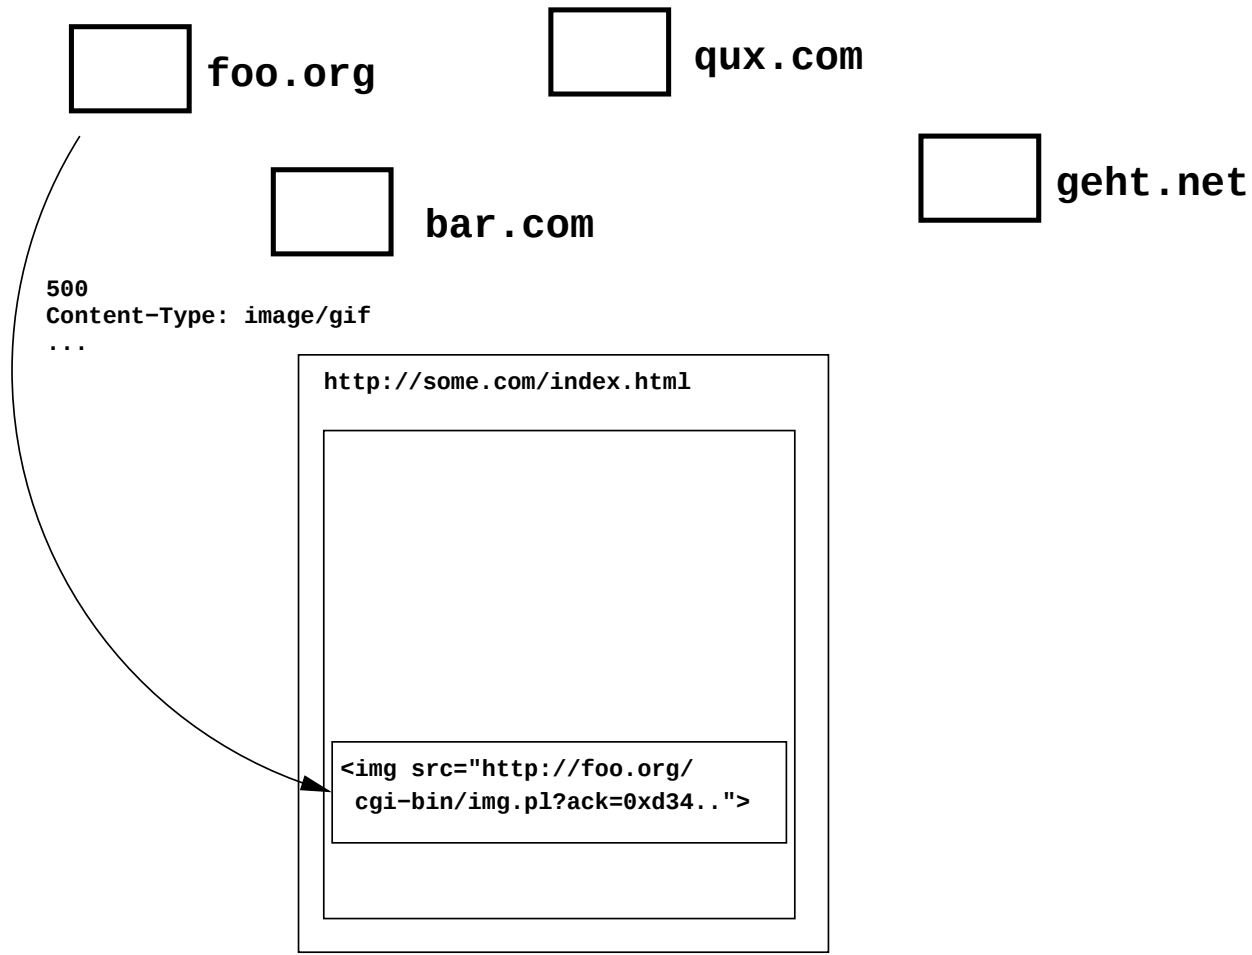

Other ways

- Cookies with Domain= .something.tld
(Broadcast)

Other ways

- Cookies with Domain= .something.tld
(Broadcast)
- Javascript:

Other ways

- Cookies with Domain= .something.tld (Broadcast)
- Javascript:
- submit prepared FORMs OnLoad

Other ways

- Cookies with Domain= .something.tld (Broadcast)
- Javascript:
- submit prepared FORMs OnLoad
- Talking Frames ?

End Points


- Have the receiver parse the HTML with a script.

End Points

- Have the receiver parse the HTML with a script.
- Steganography, but: Where on the Web are images *unique per request* with sufficient entropy?

End Points

- Have the receiver parse the HTML with a script.
- Steganography, but: Where on the Web are images *unique per request* with sufficient entropy?

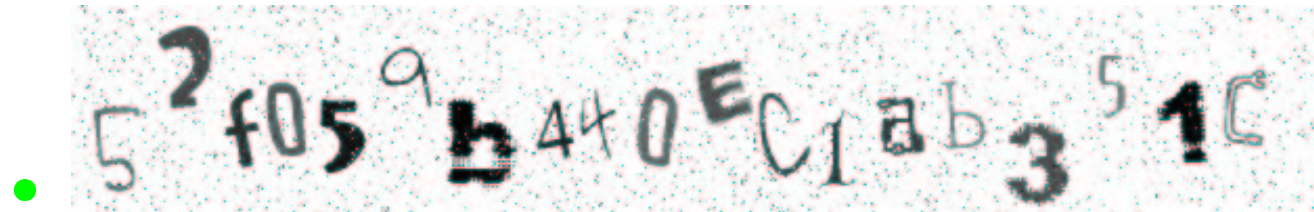

Properties

- Hapless browsers transport the data, indistinguishable from users of the PET

Properties

- Hapless browsers transport the data, indistinguishable from users of the PET
- Established protocol (Firewalls, NAT,..)

Properties

- Hapless browsers transport the data, indistinguishable from users of the PET
- Established protocol (Firewalls, NAT,..)
- Anonymity set depends on popularity of web pages