


How to realize **batches** in our Mix-cascade based system for Web browsing in a **secure and feasible** way ?

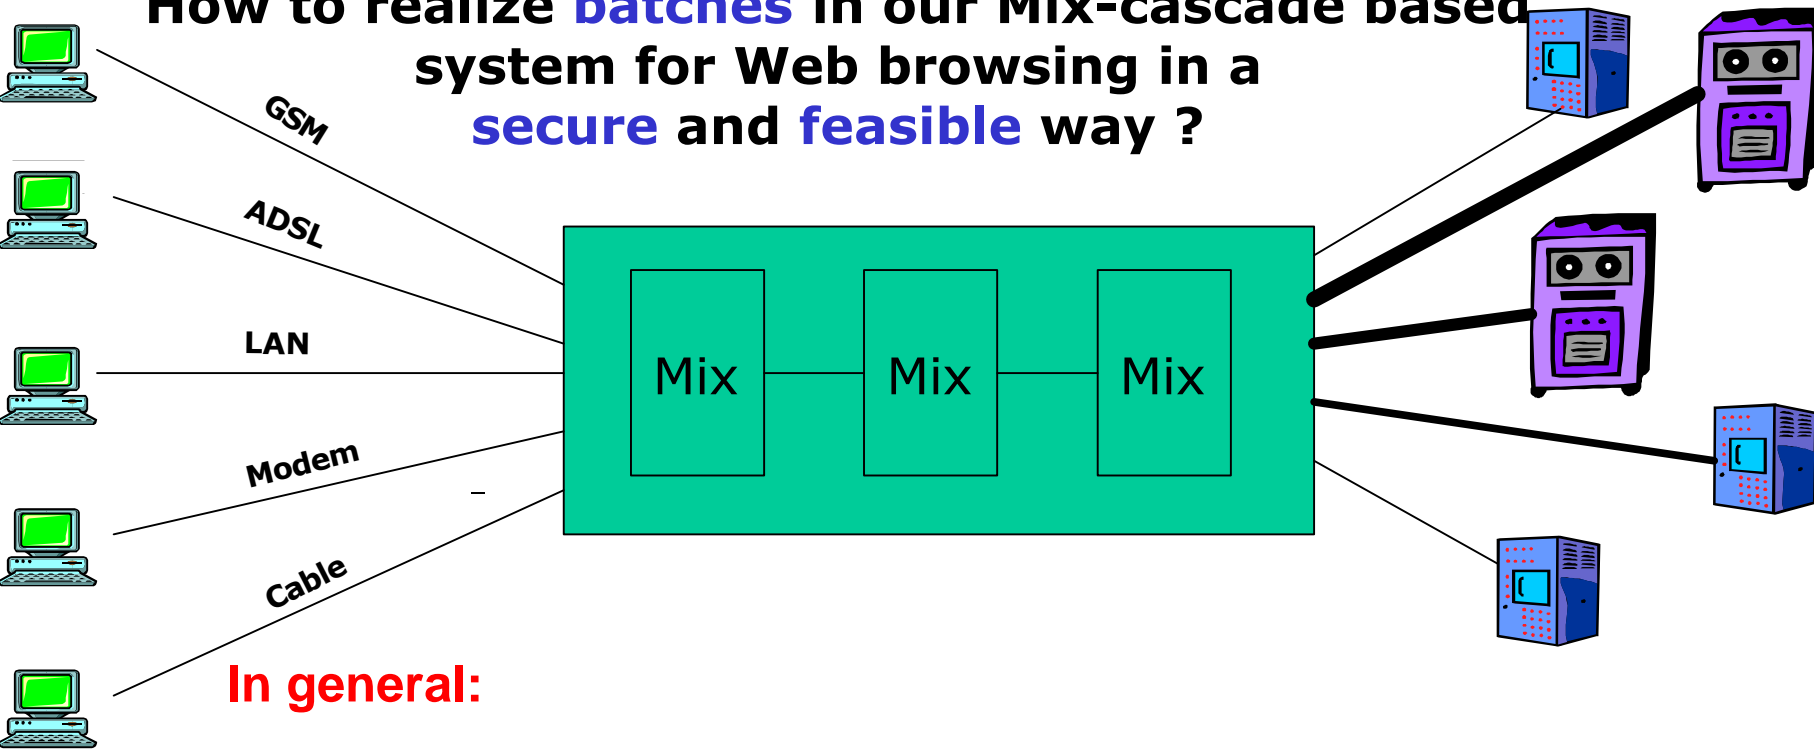

In general:

- all users have to behave equal all the time

Problems:

- links *users* \leftrightarrow *Mix* have different data rates
- no guarantees of latency or throughput
- packets could be lost \leftrightarrow packets are blocked by an attacker
- requests and responses vary in size

Solutions ??